


It's essential to keep a minimum clearance access of 700mm all around. Minimum depth of spa hole 920 mm.

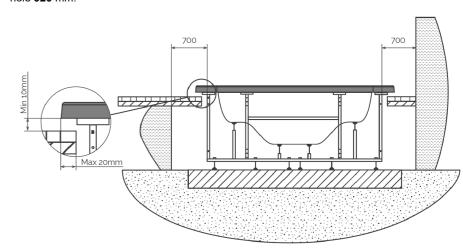

According to our policy of continuous improvement, dimensions, features or components of this product can be partially or completely changedwithout prior notice.

It's Custon	ner responsibil	ity to verify that	t this is the la	st version of th	ne drawing.			
Revision Revisión	Date Fecha	Name Nombre	Modification	Modificación				
Dimensions in mm. General Tolerances +/- 10mm				COMMERCIAL PUBLIC RANGE				
	Date	Name				Code	Rev.	Size A
D	05/05/0005	Davila C					ı	1 2.23 / (

ıberspa Drawn 05/05/2025 Paula S. 05/05/2025 Checked Bernat S. Scale 1:2 General Tolerance DIN 7168 ISO 2768g Sheet 1/1

77794

First Angle Projection 00 $4 \oplus$

Property of IBERSPA S.L. Avda. Plà d'Urgell 2-8 25200 Cervera, Spain. Don't use without permission. Keep this information confidential and use it solely for the permitted purpose.